



VIVE SUBMITTAL SHEET

Job Name: _____ Location: _____ Date: _____

Purchaser: _____ Installer: _____

Submitted to: _____ For: RNC R&R Commercial

MODEL TP-Z-955W


Universal Master Zoning Control

Up to 2 Heat 2 Cool Conventional

Up to 3 Heat 2 Cool Heat Pump

Hardwire Only

7 Day, 5/1/1 or Non-Programmable

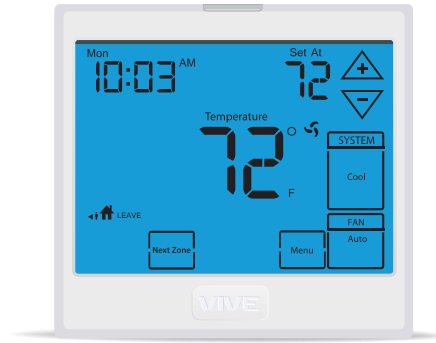

This model features:

- 13 sq. inch display
- Blue backlight
- Glow in the dark light button
- Wireless thermostat, equipment module and damper module.
- Universal subbase
- Simple private label badge system
- Adjustable Setpoint limits
- Control any zone from master control
- Up to 5 zones - (requires additional RZ251W and Z260W)
- Connect to discharge air sensor (requires RZ250W)
- 5 Year Warranty
- Customizable staging logic
- Separate heating and cooling swing (cycle rate) adjustments
- Battery or 24V power
- Room temperature calibration adjustments
- Easy wire color coded terminal blocks
- Set dual fuel balance points (requires RZ250W)
- Damper module operates 2 and 3 wire 24VAC motorized dampers
- Filter change indicator (selectable on or off)

Specifications:

Application	2 Heat 2 Cool Conventional, 3 Heat 2 Cool Heat Pump
Programmability	7 Day, 5/1/1 or Non-Programmable
System Switch	Cool - Off - Heat - Auto
Display Range	41°F to 95°F (5°C to 35°C)
Control Range	44°F to 90°F (7°C to 32°C)
Display Accuracy	+/- 1°F
Heat Swing	Adjustable from 0.2°F to 2.0°F
Cool Swing	Adjustable from 0.2°F to 2.0°F
Terminals	Rc, Rh, G, Y, Y2, C, O, B, W/E, W2
Load Rating	1 amp per terminal, 1.5 amp maximum all terminals combined
Power Source	18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire (common wire)
Operating Ambient	32°F to +105°F (0°C to +41°C)
Operating Humidity	90% non-condensing maximum
Mounting	Wall or Junction Box
Dimensions	4.7"W x 4.4"H x 0.8"D (119mm W x 112mm H x 20mm D)
Warranty	5 year warranty